

Demo panel


Pump station control panel

Customer	Example Customer Oy
Company	WireDraft demo
Drawing no.	WD-0001
Date	10/31/2026
Drawn	WD
Revision	0
Number of pages	6

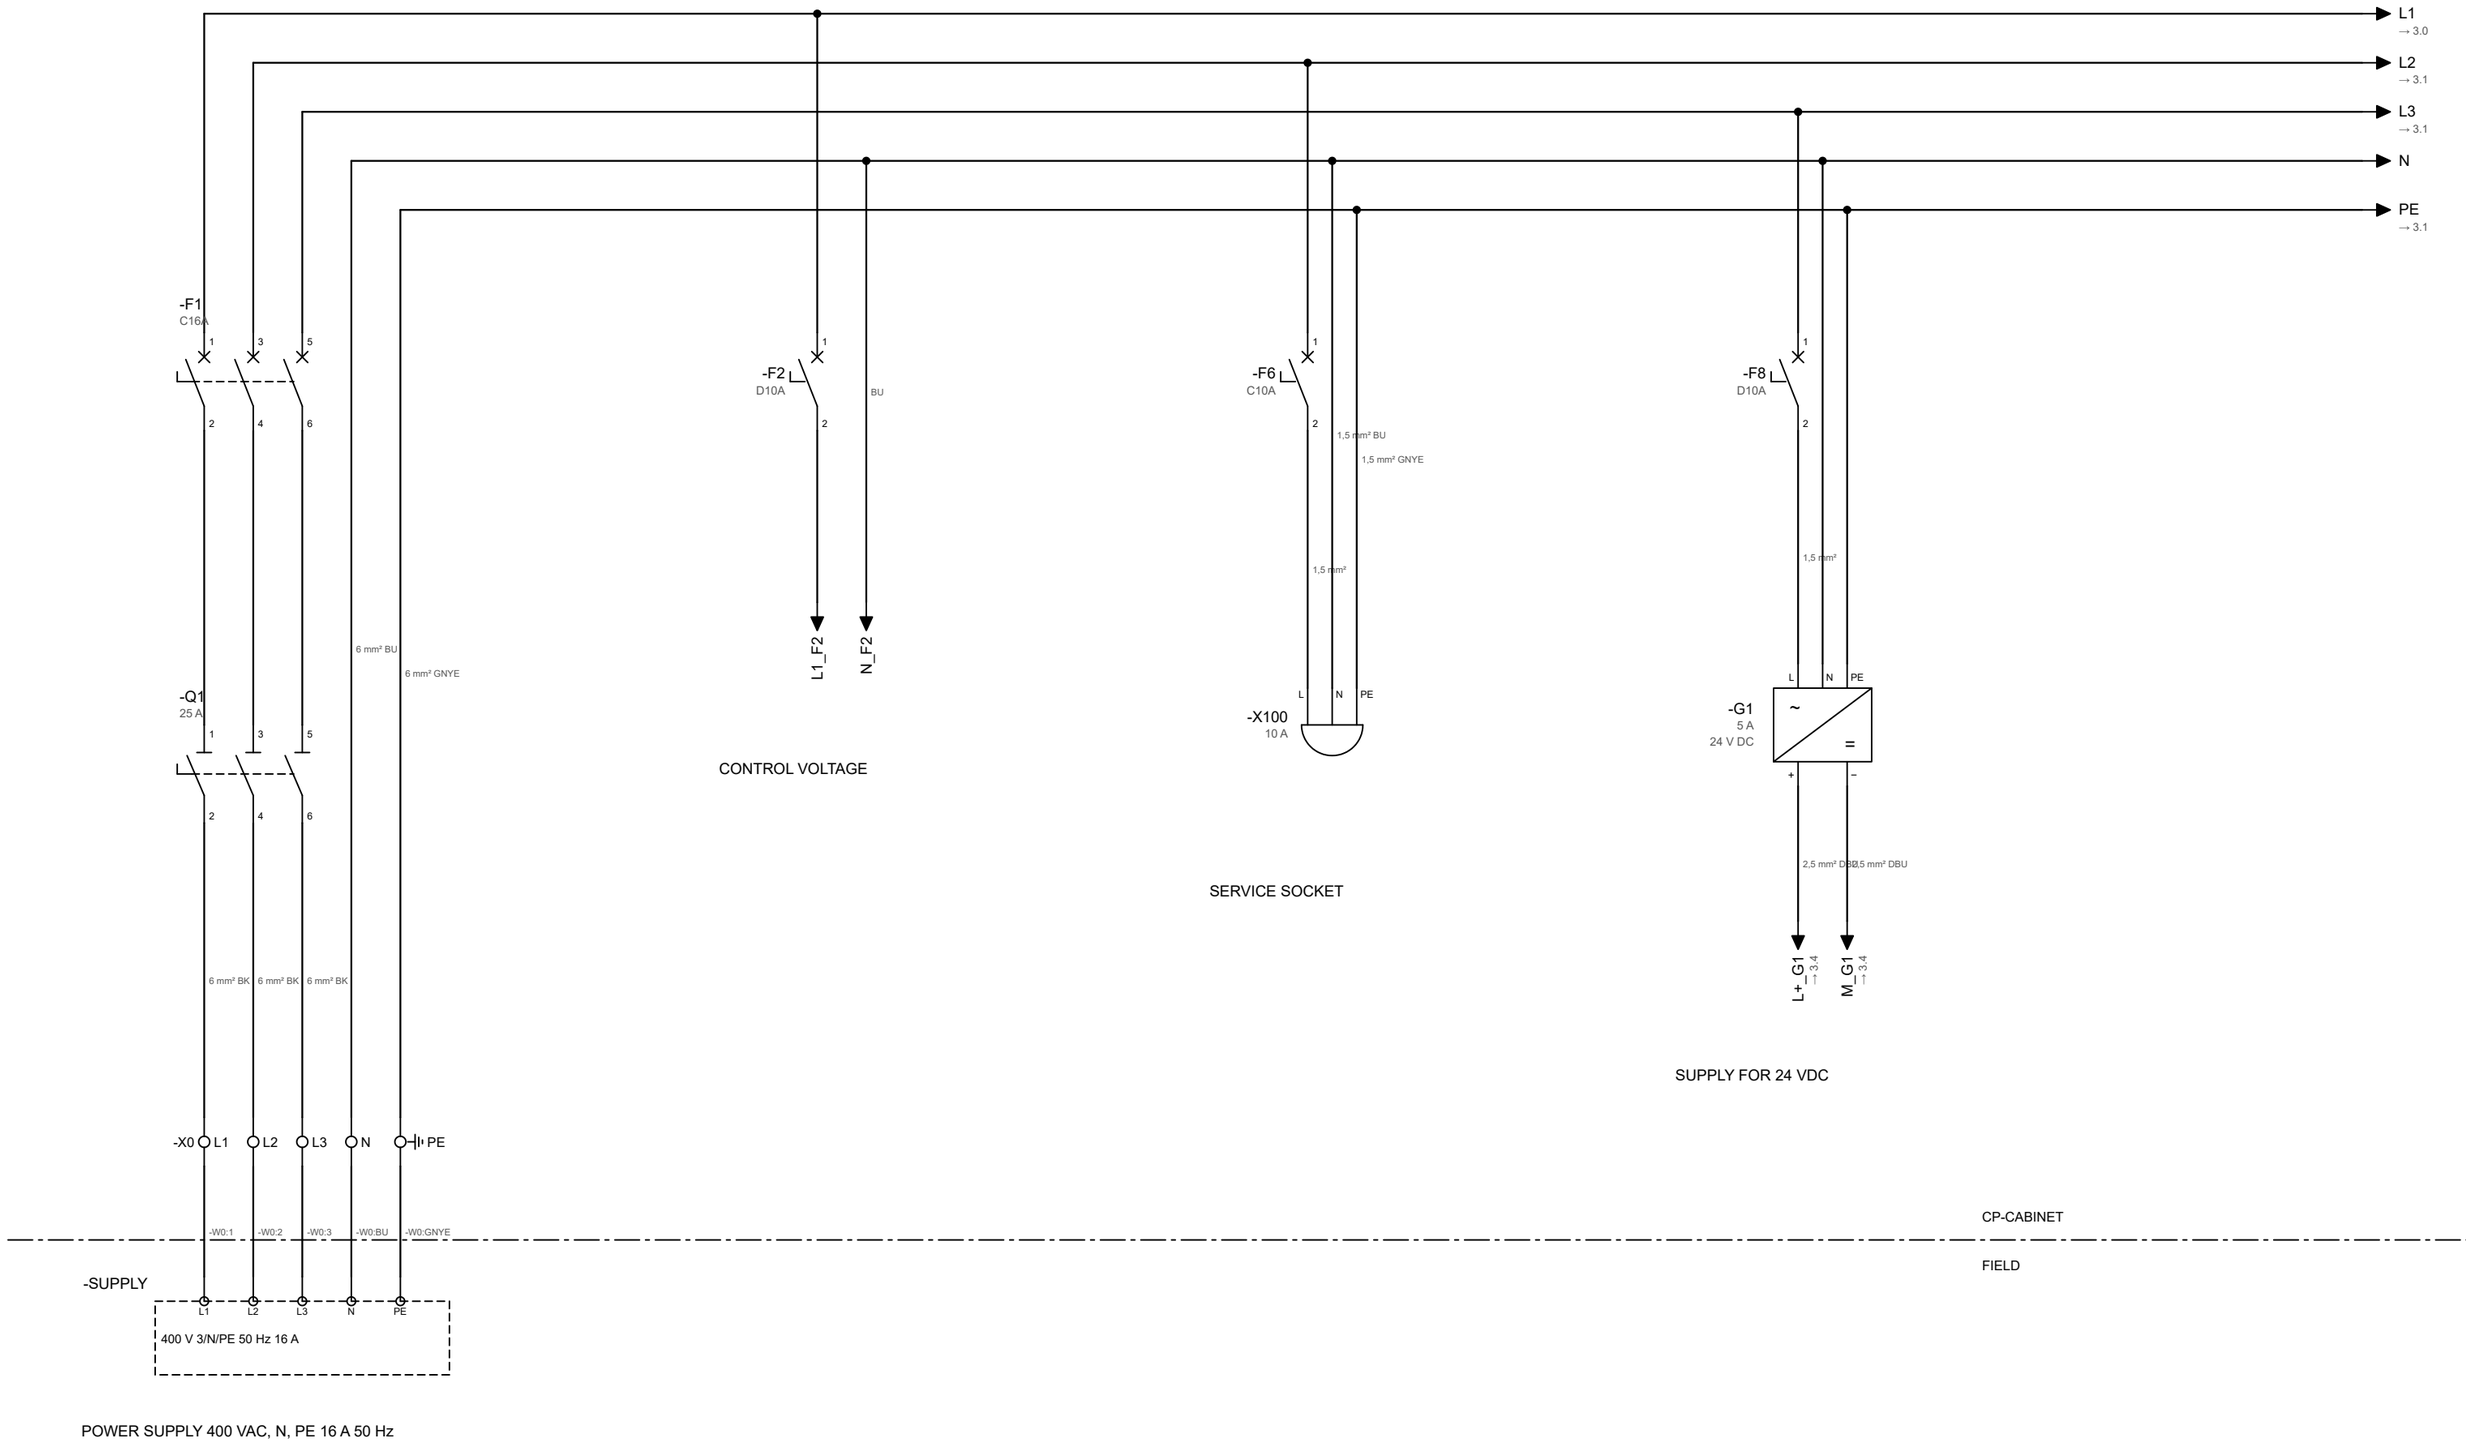

Company **WireDraft demo** Example street 1, Helsinki	Project **Demo panel** Description Pump station control panel	Page title **Power supply** Customer Example Customer Oy	Date 10/31/2026 Drawn WD Approved	Function = =PS1 Location + +CP Revision 0	Drawing no. WD-0001 Page **2** Sheet 2 / 6

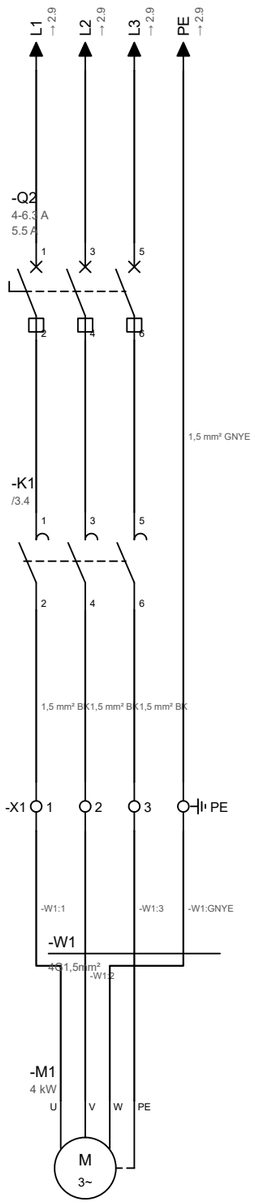

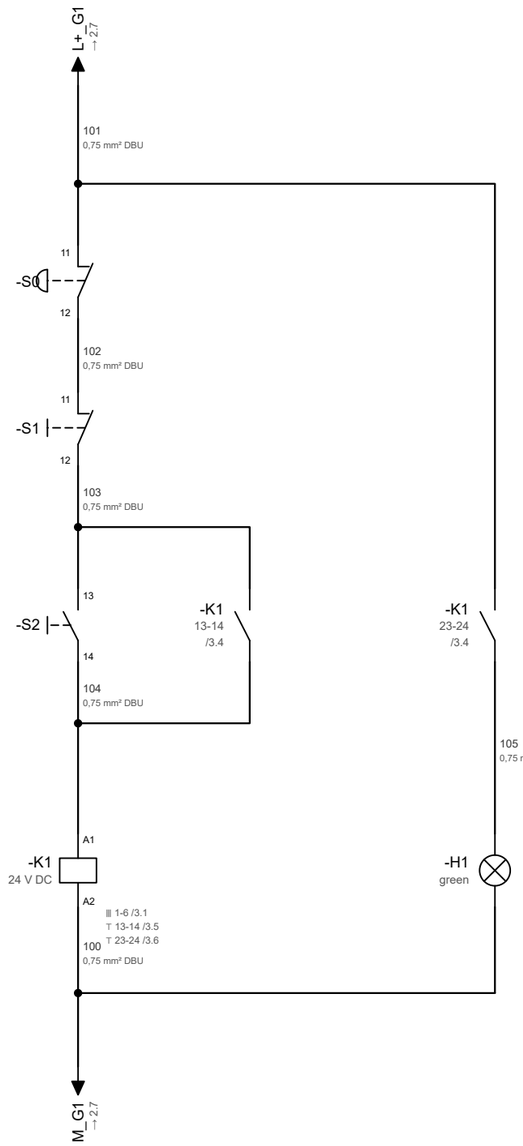

PUMP START / STOP 24 VDC

PUMP MOTOR 4 kW

	Company **WireDraft demo** Example street 1, Helsinki	Project **Demo panel** Description Pump station control panel	Page title **Pump motor -M1** Customer Example Customer Oy	Date 10/31/2026	Function = =PS1	Drawing no. WD-0001
				Drawn WD	Location + +CP	Page **3**
				Approved	Revision 0	Sheet 3 / 6

Terminal diagram -X0

Cable	Core	Target (outside)	Terminal	Bridge	Target (inside)	Size / colour	Page
-W0	1	-SUPPLY:L1	L1		-Q1:2	6 mm² BK	2.0
-W0	2	-SUPPLY:L2	L2		-Q1:4	6 mm² BK	2.1
-W0	3	-SUPPLY:L3	L3		-Q1:6	6 mm² BK	2.1
-W0	BU	-SUPPLY:N	N		→ N_F2	6 mm² BU	2.1
-W0	GNYE	-SUPPLY:PE	PE		-X100:PE	6 mm² GNYE	2.1

Terminal diagram -X1

Cable	Core	Target (outside)	Terminal	Bridge	Target (inside)	Size / colour	Page
-W1	1	-M1:U	1		-K1:2	1,5 mm² BK	3.0
-W1	2	-M1:V	2		-K1:4	1,5 mm² BK	3.1
-W1	3	-M1:W	3		-K1:6	1,5 mm² BK	3.1
-W1	GNYE	-M1:PE	PE		→ PE	1,5 mm² GNYE	3.1

Cable list

Cable	Type	From	To	Cores used	Length (m)	Description
-W0	5G2,5mm²	Supply	-X0	1, 2, 3, BU, GNYE	6	
-W1	4G1,5mm²	-X1	-M1	1, 2, 3, GNYE	12	

Total 4G1,5mm²: 12 m

Total 5G2,5mm²: 6 m